




INTERNATIONAL
CONNECTOR

**6753P8001
6753P8003**

ACTUAL
SIZE

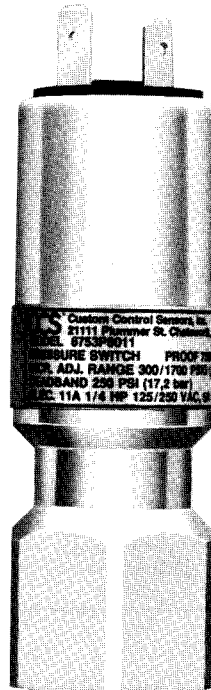

**6753P8011
6753P8013**

Press. 3,45 to 227,5 bar

**SERIES:
6753P**

INTERNATIONAL CONNECTOR

Standard Features:

- Piston
- Internal Adjustment
- Wide Range
- Weatherproof
- NEMA: 4, 13

AMBIENT TEMP. RANGE

- 30° to 160°F
- 34° to 71°C

How to set switches

Unit can be set prior to installation. Insert 1/8" Allen wrench into adjustment screw (located in pressure port) and turn clockwise to decrease setting.


PRESSURE PORT
INTERNAL ADJUSTMENT

MODEL NO.	MODEL DESCRIPTION
6753P8000	PISTON INTERNATIONAL CONNECTOR

OPERATING AND ORDERING DATA:

PRESSURE SWITCHES MODEL 6753P		PISTON PRESSURE SWITCH WITH 1/4" ALUMINUM PRESSURE PORT			FOR HIGH CYCLING—LONG LIFE— HYDRAULIC APPLICATIONS	
Max. Sys. Press. bar	Proof (Test) Press. bar	Adj. Set-Point Range		Approx. Dead band bar	Model Number and Wetted Parts	
		On Incr. Press. bar	On Decr. Press. bar		International Connector	Wetted Parts
137	207	1,03-5,86	0,34-5,17	0,69	6753P8001	Aluminum
137	207	4,82-9,65	3,79-8,61	1,03	6753P8003	400 SS , 300 SS
345	517	20,7-117	3,45-100	17,2	6753P8011	Buna N, Teflon
345	517	103-227	83-207	20,7	6753P8013	Cadmium Plated Steel

SCHEMATIC AND WIRING CODE



ELECTRICAL CHARACTERISTICS:

Rating of Switch Element

VOLTS	AMPERES	
	SPDT	Res.
125 AC—50/60 Hz	11	
250 AC—50/60 Hz	11	
30 DC	5	
125 DC	.5	

HOW TO ORDER:

1. Specify model number.

INSTALLATION DRAWING

